# Layout template and design guidelines

## Construction site advertising

barrier jackets, both sides printed differently

2 prints: 250 x 82 cm each (Width x Height) for barrier: 250 x 110 cm, Data format: 512,0 x 86,0 mm


Material: non-woven polyester, matt, approx. 150 g/m<sup>2</sup>

Finish: sewn together at top edge, other sides cut and provided with 20 metal eyelets Ø 10 mm every 50 cm, sides can be

fixed at barrier fence by cable ties (please order separately)

### Please note:

- Data format: Scale 1:10, final format + bleed
- Colors: CMYK, HKS, Pantone, RAL possible do not convert spot colors to CMYK
- Rich black (digital print): Use spot color "Schwarz"
- Resolution: 800 1200 dpi (Scale 1:10)
- Line thickness: min. 0.5 mm (positive), 1 mm (negative)
- Fonts: Convert to curves/paths
- Cutting paths: Only as a design aid be sure to remove before saving the print data
- Page layout: Please design all elements on page 2 of the template

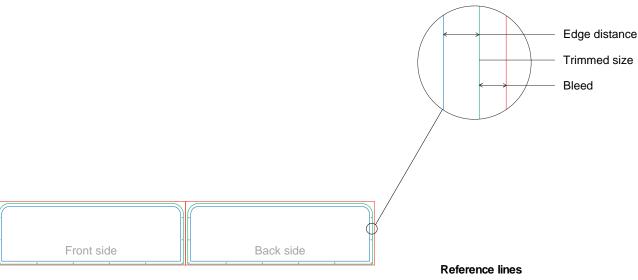

### Edge distance

Place important design elements within the blue line so that they are not obscured or cut off in the final product.

### **Trimmed Size**

The green line shows the size of your finished product.

### **Bleed**

Extend background colors and images to the red line to avoid white borders in the finished product.

Eyelet

Drawing is not true to scale.

